


Powder

The Basic Range Powder fire extinguisher is available in 1 and 2kg ABC powder models. For use on Class A, B and C fires making them suitable for use in environments containing multiple fire risks. They are highly effective against petrol and volatile liquids which makes them ideal for vehicle protection. All models are Kitemark certified to BS EN3 and CE marked.

- › Colour coded header labels.
- › Nickel plated brass valves.

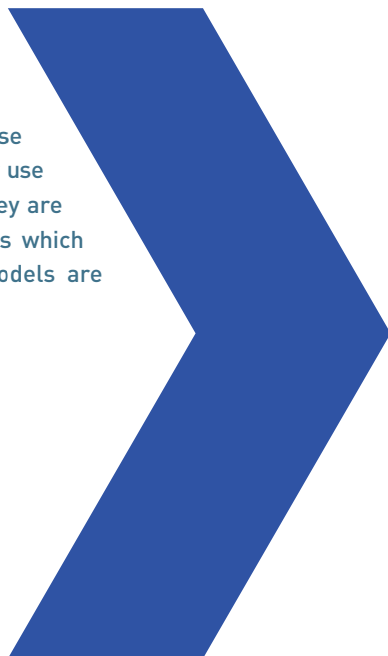

FULLY CERTIFIED



› EPS1Z : 1kg ABC Powder



› EPS2Z : 2kg ABC Powder

Product Certification and Specification



| | |
|----------------------------|--|
| › EXTINGUISHER : | |
| › PRODUCT CODE : | |
| › MEDIUM : | |
| › PROPELLANT : | |
| › FIRE RATING : | |
| › OPERATING TEMPERATURE : | |
| › OPERATING PRESSURE : | |
| › AVERAGE DISCHARGE TIME : | |
| › HEIGHT & DIAMETER : | |
| › FILLED WEIGHT : | |
| › PACKING SPEC (HxWxD) : | |

| |
|------------------|
| 1kg ABC Powder |
| EPS1Z |
| ABC Powder |
| Nitrogen gas |
| 5A 34B C |
| -30° C to +60° C |
| 14 bar at 20° C |
| 6 seconds |
| H 330mm D 85mm |
| 1.96kg |
| 360 x 135 x 90mm |

| |
|-------------------|
| 2kg ABC Powder |
| EPS2Z |
| ABC Powder |
| Nitrogen gas |
| 13A 70B C |
| -30° C to +60° C |
| 14 bar at 20° C |
| 9 seconds |
| H 378mm D 110mm |
| 3.47kg |
| 405 x 135 x 115mm |