



CUSTOMER INFORMATION

Iceland Thermal Glove

Description:

Our fully fleece lined Iceland Thermal Gloves feature a split leather palm teamed with a grain leather back, making the the perfect choice if you're working in chilled environments or cold stores.

- Conforms to EN 388 levels 3-1-3-3
- Conforms to EN 511 levels 1-2-X
- Ribbed knit wrist
- Azo free

Fabric:

- Split leather front
- Grain leather back
- Full fleece liner

Applications:

Tasks with cold working, cold stores

Colourways:



Tan

Product Codes:

27443 One Size Iceland Tan

Standards:



EN 388



Abrasion: 3
Blade Cut: 1
Tear: 3
Puncture: 3

EN 511




Convective Cold: 1
Contact Cold: 2
Water Penetration: X

EC Council Directive 89/686/EEC

BS EN 420:2003+A1:2009 - Sizing & Dexterity: PASS

BS EN 388:2003 - Protection Against Mechanical Hazards

BS EN 511:2006 - Protection Against Cold



Size Chart:


Measurements in mm	7 (S)	8 (M)	9 (L)	10 (XL)	11 (2XL)
Hand Length (A)	171	182	192	204	215
Hand Circumference (B)	178	203	229	254	279

Issue No.: 2

Issue Date: 13/02/2014

Packaging: 1 piece per bag - 12 bags per master bag - 10 master bags per case

Outer Carton Artwork:

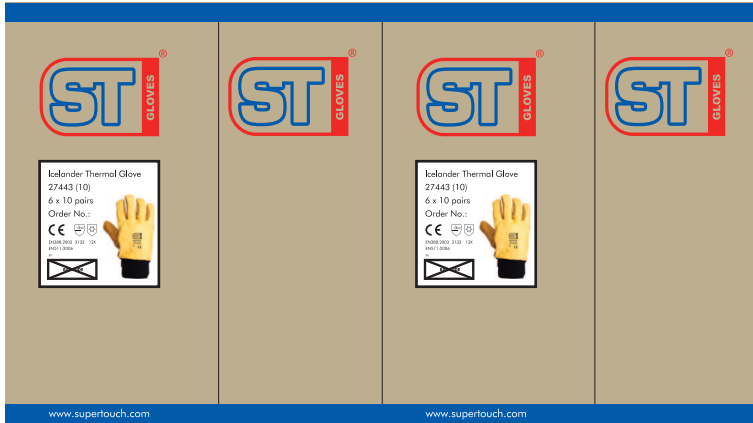

Inner Artwork:

ICELANDER THERMAL GLOVE
27443 (Yellow)
ONE SIZE

CE EN ISO 22716:2011
CAT II

Certification Body: SATRA Technology Centre, Kettering, NN16 8SD, United Kingdom
These products are classified as Personal Protective Equipment by the European PPE Directive 89/656/EEC.
CAREFULLY READ INSTRUCTIONS BEFORE USE
This product is designed to provide protection against Mechanical Risks. No item of PPE can provide full protection - care must always be taken whilst carrying out the activity.

EN 420:2009 A1:2009 Protective Gloves - General Requirements
Fitting & Sizing:
Cat II - most products of a similar size. Products which are either too loose or too tight will restrict movement and will not provide the optimum level of protection.
Storage & Transport:
Store the product in a well ventilated area away from extremes of temperature & strong odours.
Inspection Before & After Use:
Discard and replace damaged products before use. If in doubt consult manufacturer.
Cleaning:
It is recommended that this product should not be washed or dry-cleaned.

EN 388:2003 - Protective Gloves Against Mechanical Risks

Test	Level Achieved	Maximum Level
Abrasion Resistance	3	(4)
Edge Cut Resistance	1	(2)
Tear Resistance	3	(4)
Puncture Resistance	3	(4)

Note:
Performance levels apply to the palm area of the hand.
Warning:
These gloves will not prevent crushing injuries, or injuries associated with vibration. They are not to be worn when there is a risk of entanglement by moving parts of machines.

EN 511:2006 - Protective Gloves Against Cold

Property	Level Achieved	Maximum Level
Convective Cold	1	(4)
Contact Cold	2	(4)
Water Penetration	X	(1)

Warning:
This glove will not prevent frostbite or frostbite associated with water penetration that may lose its insulative properties when wet.
Selection Process:
The individual conditions, environment and occupation must be considered when selecting a glove.

This product is supplied under control. Certified to meet the requirement of BS 6801.
Unit A1 Hubert Road, Brentwood, Essex, CM14 4JE
www.supertouch.com

Feature Symbols:



Product packed in retail bags

The information shown on this specification sheet is intended as a guide and is advisory only. All details were correct at the time of issue. As conditions of use are ultimately beyond our control, we advise that the product is tested for the particular application before use.