

Premier Surface Entrance Matting Tiles


Entrance tiles designed to be laid directly to the floor surface



- No matwell required, interlocking entrance tiles can be laid to surface.
- Solid surface tiles effectively capture dirt to protect interior floors.
- Hardwearing nylon carpet inserts scrape dirt and wipe moisture.
- PVC base tile is manufactured from 100% recycled materials.
- Suitable for high volume footfall in commercial locations.
- Optional 'impact-resistant' bevelled edges and corners and T-pieces withstand heavy shopping trolleys.
- Co-ordinating Alba carpet can also be supplied in rolls for primary and secondary dirt barrier use.
- Fire tested to BS EN 13501-1 and slip tested to BS 7676-2.



Styles Available

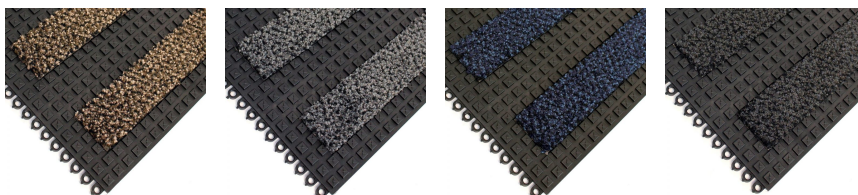

Brown

Grey

Blue

Anthracite

Parts

Part Number	Size	Colour	Weight
PSC010101	30 cm x 30 cm	Anthracite	0.60 kg
PSC010201	30 cm x 30 cm	Blue	0.60 kg
PSC010501	30 cm x 30 cm	Brown	0.60 kg
PSC010601	30 cm x 30 cm	Grey	0.60 kg
PSE00002	Edging: 78 mm x 2.0 m lengths	Black	
PSC00004	Corners: 100 mm x 100 mm	Black	0.05 kg

Technical Specification

Material	ECONYL® Regenerated Nylon in PVC tile
Product Height	12 mm
Typical Applications	Entrance areas
Installation Method	Laid to surface - fixed with screws
Country of	UK

Origin

Guarantee 5 years

Notes Alba is a tufted carpet product and therefore its appearance can vary depending on the direction of the pile and the light in the surrounding environment. To achieve a uniform appearance consider hoovering the product in a single direction.

Slip Tested to BS 7676-2 - low slip potential

Get in touch | To order FREE samples or arrange a site visit please call +44 (0)116 240 1088 or email sales@cobaeurope.com