

**LIGHTWEIGHT PALM-COATED LATEX GLOVE WITH CUT PROTECTION**

Lightweight with a high level of cut resistance and thermal resistance to 100°C for short contact. Great grip in wet and dry handling conditions.

**FEATURES**

- › Supple and lightweight (13 gauge) para-aramid, mixed fibre liner provides level D cut resistance (EN 388:2016)
- › Very good durability and resistance to contact heat up to 100°C
- › Blended with Spandex for comfort, ergonomic fit and dexterity
- › Crinkle latex palm coating finish offers optimum wet and dry grip
- › Sanitized® antimicrobial finish provides extra freshness
- › Wrist well protected



**SUITABLE FOR**

**Typical Industries**

- Aerospace
- Automotive
- Construction
- Glass
- Steel and Metals

**Suitable Applications**

- Glass Handling
- Metal Fabrication
- Metallurgy
- Paper Manufacturing
- Plastics Manufacturing

**CERTIFICATION**

CAT II	EN 388:2016	EN 407:2004
	3X42D	X1XXXX

See overleaf for explanation

### PRODUCT INFORMATION

MATERIALS	LINER:	13 gauge aramid, glass fibre, nylon
	COATING:	Latex
COLOUR	Yellow/Black	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

### ORDERING DETAILS

SIZE	CODE	PACKAGING
7/S	SKY1011	10 pairs per bag 120 pairs per case
8/M	SKY1012	
9/L	SKY1013	
10/XL	SKY1014	
11/XXL	SKY1015	

### RECOMMENDATIONS FOR USE

- **USE:** General handling glove with cut protection. Not suitable for high thermal, electrical and chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use
- **WARNING:** Latex may cause allergies

### CERTIFICATION LEGENDS




MECHANICAL HAZARDS EN 388:2016  
PERFORMANCE LEVELS\*



\*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



HEAT AND FIRE  
EN 407

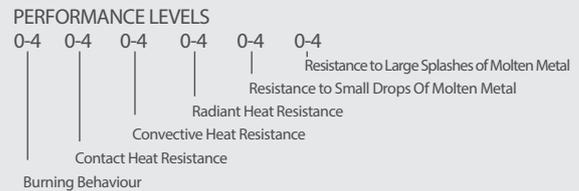

#### EUROPE

[www.globusgroup.com](http://www.globusgroup.com)

**E:** sales@globus.co.uk  
**T:** +44 (0)161 877 4747  
**F:** +44 (0)161 877 4746

#### MIDDLE EAST AND AFRICA

[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)

**E:** gcc@globusgroup.com  
**T:** +971 4 882 9962  
**F:** +971 4 882 9963

